

APP CRS	Rwy Idg	9000
267°	TDZE	96
	Apt Elev	96

RNAV (RNP) Y RWY 26R

GEORGE BUSH INTERCONTINENTAL/HOUSTON (T A H)

T For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and increase RNP 0.15 all Cats visibility to 1¼ SM. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSF-2




MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 120.72 290.2	GND CON 121.7	CLNC DEL 128.1	CPDLC
-------------------------	--	--------------------------------------	-------------------------	--------------------------	-------

RADAR REQUIRED

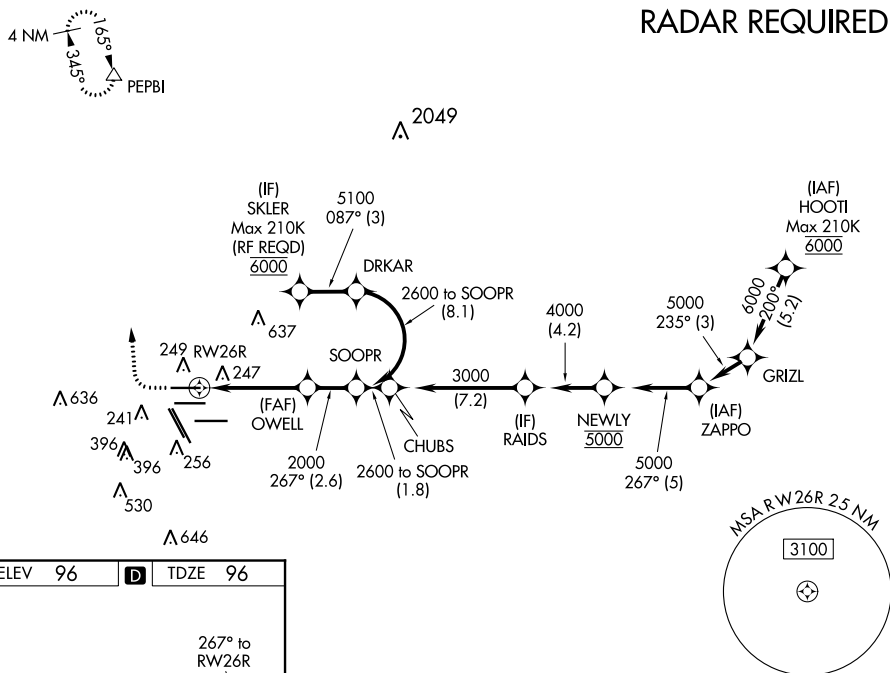

ELEV 96	D	TDZE 96
---------	----------	---------

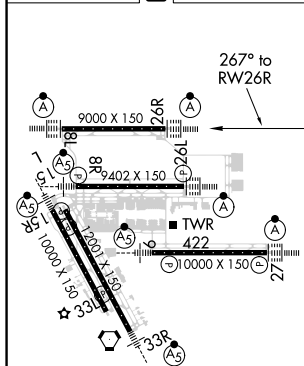

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L,
27 and 33L
HRL qll Rwy

600 ↑	3000 ↗	PEPBI △	See planview for multiple IF locations.		
CATEGORY	A	B	C	D	
RNP 0.11 DA	429/40		333 (400-¾)		
RNP 0.15 DA	496/45		400 (400-¾)		
RNP 0.30 DA	554/50		458 (500-1¼)		
AUTHORIZATION REQUIRED					

AUTHORIZATION REQUIRED